



KNIGHT UNDERWRITERS TL-15 CLASS "ER"

MERCANTILE & BROADFORM BANK RATING "BR"

Knight TL15 Safes offer the highest state of the art in American made money safes. These square door safes qualify for Mercantile and Broadform Insurance Class "ER" with a Bank Rating of "BR." In addition to the standard features a wide range of options, such as time locks, special interiors; 3-way bolt system, etc. are available. See reverse side for standard sizes.

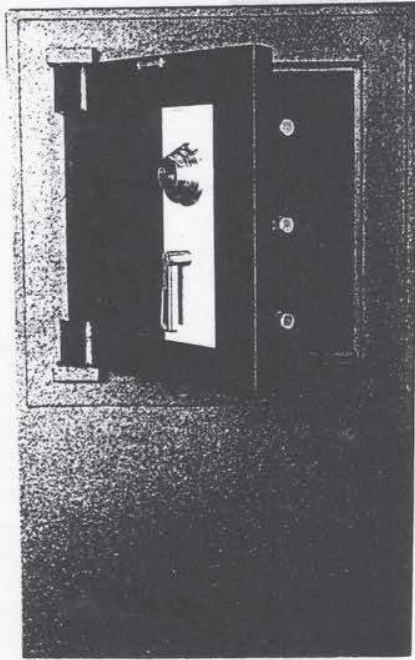

2020 Incladding

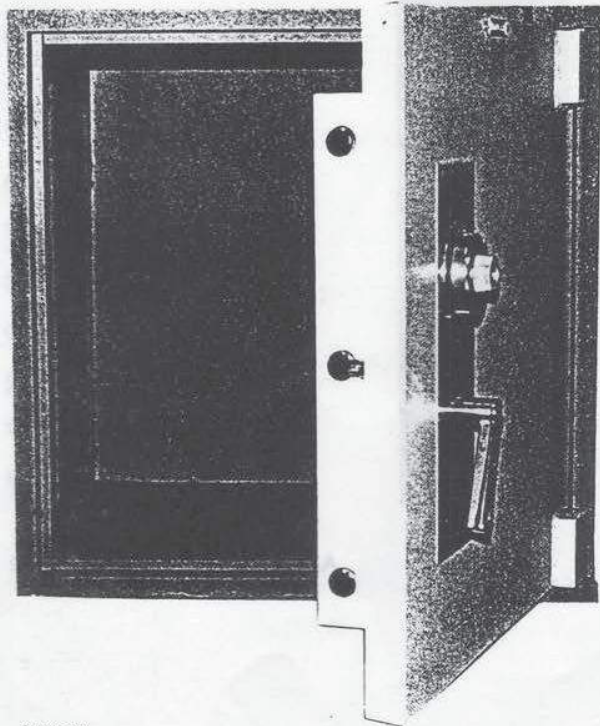

2424-20

Construction Characteristics

- 1 inch body and 1½ inch doors of carbon steel with 50,000 lbs. tensile strength. All joints electrically welded.
- Group II Underwriters approved lock and separate relocking device.
- Spyproof key locking dial for dual custody.
- Bolt detent to eliminate damage to locking bolts.
- The country's finest drill resistant hard plate protecting the lock and EACH locking bolt.
- All doors removeable and adjustable when open.
- Three or more one inch chrome locking bolts.
- Continuous locking bar on hinge side.
- Extra heavy hinges with ball bearings and a single pivot point.
- Hard plate protecting lock is Xray proof, radiographic proof, drill resistant and punch resistant.
- 24" high and larger available with 3-way bolt system.
- Bottom of all safes treated with Zinc Chromate to prevent rust.
- All safes painted with Polane® Polyurethane Enamel to give them superior appearance and durability.
- Wide range of optional interiors, timelocks, time delays, and claddings available.
- All safes carry full one year warranty.

BUY AMERICAN

STANDARD SIZES — Custom sizes on request

| Model | Inside | | | Outside | | | Clear Door Opening H W | Capacity Cubic In. | Weight Lbs. |
|-------|--------|----|----|---------|----|----|------------------------------|-----------------------|----------------|
| | H | W | D | H | W | D* | | | |
| 1212 | 12 | 12 | 12 | 14 | 14 | 17 | 11 | 1,728 | 381 |
| 1616 | 16 | 16 | 16 | 18 | 18 | 21 | 15 | 4,096 | 638 |
| 2020 | 20 | 20 | 20 | 22 | 22 | 25 | 19 | 8,000 | 919 |
| 2420 | 24 | 20 | 20 | 26 | 22 | 25 | 23 | 9,600 | 1,015 |
| 2424 | 24 | 24 | 20 | 26 | 26 | 25 | 23 | 11,520 | 1,143 |
| 2424D | 24 | 24 | 24 | 26 | 26 | 29 | 24 | 13,824 | 1,258 |
| 3020 | 30 | 20 | 20 | 32 | 22 | 25 | 29 | 12,000 | 1,239 |
| 3024 | 30 | 24 | 20 | 32 | 26 | 25 | 29 | 14,400 | 1,329 |
| 3028 | 30 | 28 | 20 | 32 | 30 | 25 | 29 | 16,800 | 1,468 |
| 3030 | 30 | 30 | 20 | 32 | 32 | 25 | 29 | 18,000 | 1,551 |
| 3030D | 30 | 30 | 24 | 32 | 32 | 29 | 29 | 21,600 | 1,685 |
| 3434 | 34 | 34 | 26 | 36 | 36 | 31 | 33 | 30,056 | 2,072 |
| 3624 | 36 | 24 | 20 | 38 | 26 | 25 | 35 | 17,280 | 1,535 |
| 3636 | 36 | 36 | 20 | 38 | 38 | 25 | 35 | 25,920 | 1,992 |
| 4024 | 40 | 24 | 20 | 42 | 26 | 25 | 39 | 19,200 | 1,657 |
| 4034 | 40 | 34 | 26 | 42 | 36 | 31 | 39 | 35,360 | 2,358 |
| 4524 | 45 | 24 | 20 | 47 | 26 | 25 | 44 | 21,600 | 1,798 |
| 5024 | 50 | 24 | 20 | 52 | 26 | 25 | 49 | 24,000 | 1,967 |
| 5030 | 50 | 30 | 20 | 52 | 32 | 25 | 49 | 30,000 | 2,250 |
| 5034 | 50 | 34 | 26 | 52 | 36 | 31 | 49 | 44,200 | 2,747 |
| 6030 | 60 | 30 | 20 | 62 | 32 | 25 | 59 | 36,000 | 2,604 |
| 6034 | 60 | 34 | 26 | 62 | 36 | 31 | 59 | 53,040 | 3,159 |
| 6634 | 66 | 34 | 26 | 68 | 36 | 31 | 65 | 58,344 | 3,452 |
| 7234 | 72 | 34 | 26 | 74 | 36 | 31 | 71 | 63,648 | 3,677 |
| 8234 | 82 | 34 | 26 | 84 | 36 | 31 | 77 | 72,488 | 4,109 |

Add 2" to depth for handle

