

Major TL-15 Rectangular Door Money Safes

Security and convenience

Major's TL-15 rectangular door safes are made especially for stores, banks and other businesses which require security and convenience in the storage of such valuables as cash, coins, papers and jewelry.

These safes have been thoroughly tested by Underwriter's Laboratories, Inc. and awarded the TL-15 label. They have proved themselves exceptionally resistant to attacks by power and hand tools.

Built extra tough for super protection

By qualifying for low ER rates on Mercantile Safe and Broad Form policies and a BR rating on Bank policies, Major's TL-15 safes provide affordable, convenient security.

Even the exterior is more efficient, with front-mounted precision ball-



bearing hinges that take up less room than conventional side-mounted hinges. The textured urethane coating is exceptionally resistant to chipping, staining and abrasion for years of "like new" appearance. The standard color is Major grey but other colors and color matching are available.

Optional modular interiors, including shelves, coin racks and individually-locked compartments, are available to meet particular needs. Major also offers special safe and cadding sizes to your specifications.

Advanced features

The large door gives access to all of the interior. A unique locking mechanism makes it possible to store roll coin in the door for maximum efficient use of space.

Major's proprietary hardplate incorporates

tungsten carbide in a steel matrix to make a plate which is extremely hard and tool resistant. It protects the lock, locking mechanism and relockers.

Multiple relocking devices deadlock the bolts if the dial, handle or lock are attacked. The hardened bolts and their actuating mechanism are located against solid stops when locked to resist punching, driving, wedging, abrasive wheel and saw attacks. Recessed and welded door jambs prevent the door being driven into the safe.

The spy-proof chrome dial prevents unauthorized observation of the combination. The U.L. Group 2 key change combination lock offers 1,000,000 possible combinations.

Optional equipment

Major's TL-15 safes offer a number of optional convenience and security features. Select those to meet your specific requirements.

Coin Racks permit quick, easy stacking of coins by denomination.

Shelves allow proper organization and storage of cash and trays, jewelry display boards, etc.

Deposit Compartments allow for periodic trimming of cash registers and armored car pickup of deposits.

A Key-Locking Dial which prevents dialing of the combination without a key and for day control.


Time Delay Lock

Two- or Three-Movement Time Locks

U.L. approved Group I or IR Locks

Wire Wrap in clad units for alarms

Door Mounted Key Rack

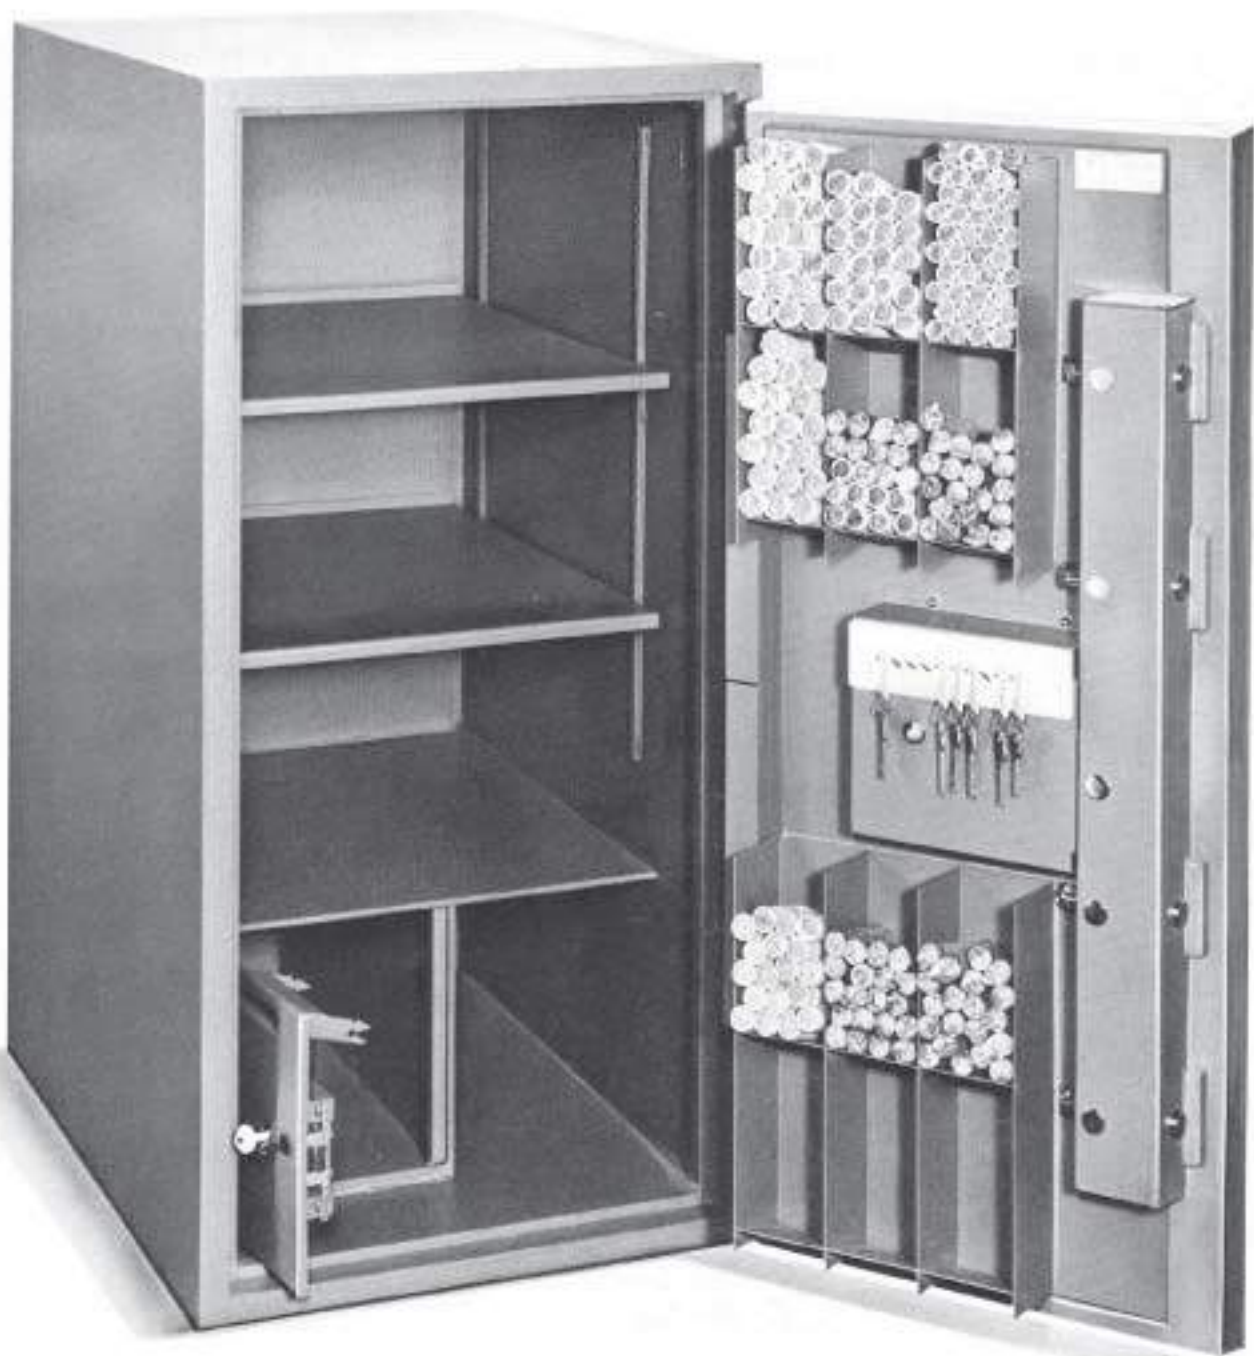

Note: Shelves, coin rack, deposit compartment and key holder are optional extras.

Model Numbers		Dimensions								Cubic inch c.a.D.	Approximate shipping weight		
		Inside			Outside			Clear door opening			Un-clad	Clad	
Un-clad	In-cladding	High	Wide	Deep	High	Wide	Deep	High	Wide			Empty	Filled
ER161614		16	16	14	18	18	18 $\frac{1}{2}$	16	14 $\frac{1}{2}$	3584	590		
	ER161614CD	16	16	14	24	24	21 $\frac{1}{2}$	16	14 $\frac{1}{2}$	3584		645 1170	
ER181814		18	18	14	20	20	18 $\frac{1}{2}$	18	16 $\frac{1}{2}$	4536	680		
	ER181814CD	18	18	14	26	26	21 $\frac{1}{2}$	18	16 $\frac{1}{2}$	4536		740 1325	
ER202020		20	20	20	22	22	24 $\frac{1}{2}$	20	18 $\frac{1}{2}$	8000	920		
	ER202020CD	20	20	20	28	28	27 $\frac{1}{2}$	20	18 $\frac{1}{2}$	8000		1000 1790	
ER242424		24	24	24	26	26	28 $\frac{1}{2}$	24	22 $\frac{1}{2}$	13824	1270		
	ER242424CD	24	24	24	32	32	31 $\frac{1}{2}$	24	22 $\frac{1}{2}$	13824		1375 2435	
ER302420		30	24	20	32	26	24 $\frac{1}{2}$	30	22 $\frac{1}{2}$	14400	1355		
	ER302420CD	30	24	20	38	32	27 $\frac{1}{2}$	30	22 $\frac{1}{2}$	14400		1460 2525	
ER303024		30	30	24	32	32	28 $\frac{1}{2}$	30	28 $\frac{1}{2}$	21600	1705		
	ER303024CD	30	30	24	38	36	31 $\frac{1}{2}$	30	28 $\frac{1}{2}$	21600		1835 3165	
ER362420		36	24	20	38	26	24 $\frac{1}{2}$	36	22 $\frac{1}{2}$	17280	1555		
	ER362420CD	36	24	20	44	32	27 $\frac{1}{2}$	36	22 $\frac{1}{2}$	17280		1675 2860	
ER363224		36	32	24	38	34	28 $\frac{1}{2}$	36	30 $\frac{1}{2}$	27648	2030		
	ER363224CD	36	32	24	44	40	31 $\frac{1}{2}$	36	30 $\frac{1}{2}$	27648		2180 3700	
ER402420		40	24	20	42	26	24 $\frac{1}{2}$	40	22 $\frac{1}{2}$	19200	1680		
	ER402420CD	40	24	20	48	32	27 $\frac{1}{2}$	40	22 $\frac{1}{2}$	19200		1810 3070	
ER502420		50	24	20	52	26	24 $\frac{1}{2}$	50	22 $\frac{1}{2}$	24000	2005		
	ER502420CD	50	24	20	58	32	27 $\frac{1}{2}$	50	22 $\frac{1}{2}$	24000		2155 3615	
ER733426		73	34	26	75	36	30 $\frac{1}{2}$	73	32 $\frac{1}{2}$	64532	3745		
	ER733426CD	73	34	26	81	42	33 $\frac{1}{2}$	73	32 $\frac{1}{2}$	64532		4005 6580	

- Notes: 1 - A kl to inches to outside depth for handle.
2 - Door must swing 125° to allow direct access to interior.
3 - Safes weighing less than 750 pounds should be anchored to the floor.