
MUTUAL

Body: Double layer seimans steel filled with a 2" inner layer of tough 6000 PSI aggregate; special insulating layer on door ensures fire protection.

Bolts: Massive 1" locking bolts.

Interior: Special key locking drawer(s) and ½" increment adjustable shelve(s).

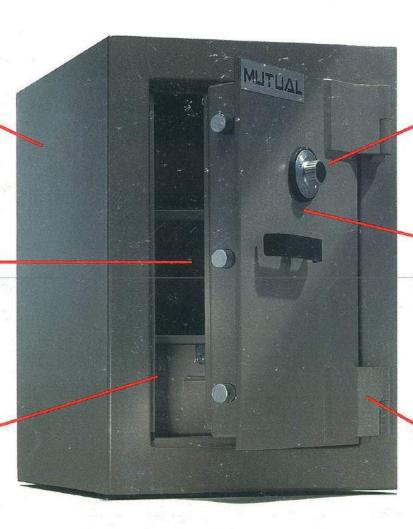

Lock: Dependable U.L. Group 2 combination locks protected by a ¼" Rockwell C60 hard plate (DP5 also has a keylock).


Relockers: Independent relockers, one live and one passive, automatically trigger in the advent of an attack.

Hinges: Heavy duty, wrap around hinge locks secured with a full length steel rebate bar.

The Dual Protector

From the country where diamonds and security all began, Mutual proudly introduces the Dual Protector. Designed by security specialists to protect the priceless, this safe gives you everything you want and need in a safe—fire and burglary protection.

MUTUAL




DIMENSIONS, WEIGHTS AND FEATURES

MODEL	EXTERIOR			INTERIOR			SHELVES/	CAPACITY		WEIGHT
	Н	W	D	H	W	D	DRAWERS	CU. IN.	CU. FT.	(LBS)
DP1	191/2	171/2	171/2	131/2	111/2	111/2	1/0	1785	1.1	407
DP2	25	171/2	171/2	19	111/2	11½	1/1	2513	1.3	495
√ DP3	311/2	19¾	19¾	251/2	131/2	14	1/1	4820	2.8	712
DP4	311/2	271/2	271/2	26	211/2	19	1/2	10621	6.3	1120
*DP5	391/4	271/5	271/5	33	21%	19	2/2	13480	8.1	1364

^{*}DP5 equipped with a keylock in addition to combination lock.



Lab tested at 1562°F for ½ hour with the interior temperature maintained at 250°F.



DOOR SWING PROJECTIONS

DOOR SWING DIMENSIONS								
MODEL	A	В	С					
DP1	11½	321/4	301/8					
DP2	111/2	321/4	30%					
DP3	131/2	361/4	341/4					
DP4	211/2	51%	49¾					
DP5	211/2	51%	49¾					

