




**SECURIFORT**  
INC



- ◆ **TL15 rated mechanism**
- ◆ **Pry resistant door**
- ◆ **Formed Body**
- ◆ **Re-locking device with 1/4 thick hard plate**
- ◆ **"C" rated safe**




**"C" Rated Safe**

**PC 686**



# SPECIFICATIONS:

- ◆ BODY BUILT IN 1/2" THICK SOLID STEEL.
- ◆ DOOR MADE OF 1" THICK SOLID STEEL.
- ◆ LOCK #6730 S&G STANDARD WITH ILCO FLUSH DIAL & RING.
- ◆ BOLT WORK WITH 3 SLIDING BOLTS 1" Ø & MECHANISM PROTECTED BY HARD PLATE.
- ◆ 4 ANCHOR HOLES 5/8 DIA.
- ◆ PAINTED FINISH.



**SECURIFORT**  
INC

## "C" RATED SAFE

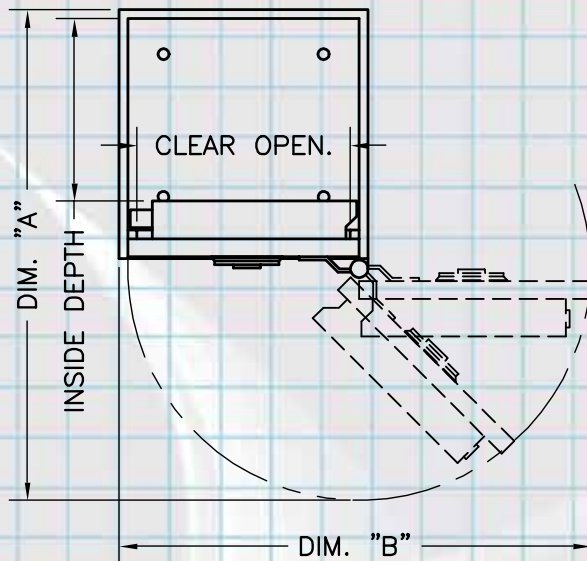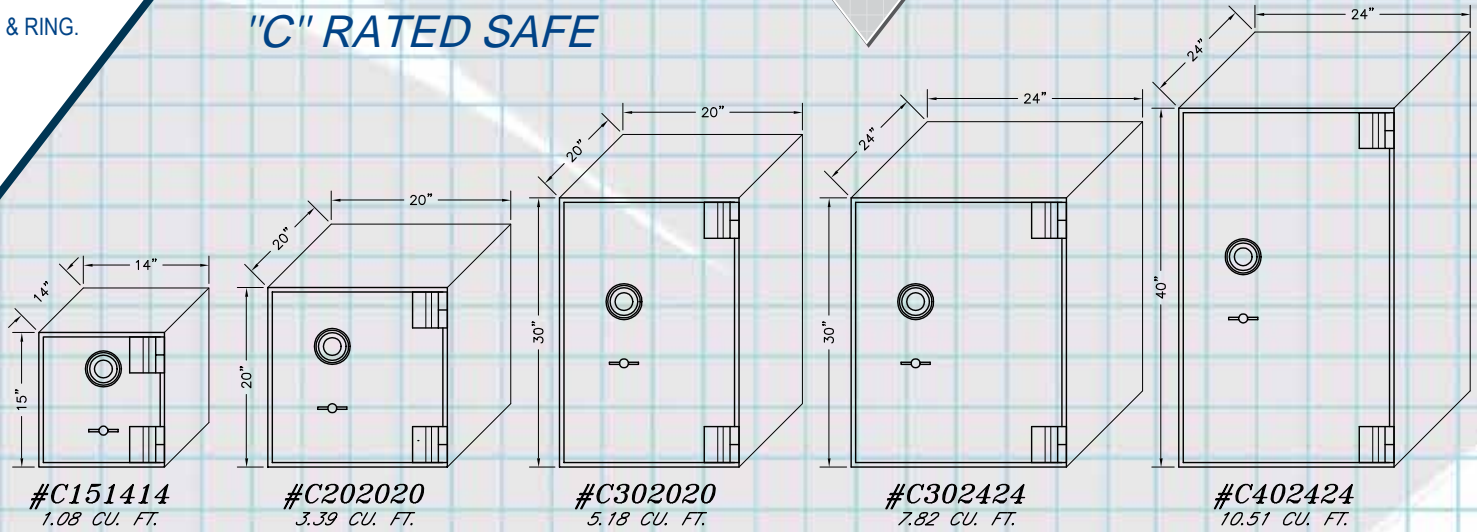

MODEL #	C151414	C202020	C302020	C302424	C402424
DIM. "A"	27 9/16"	39 9/16"	39 9/16"	47 9/16"	47 9/16"
DIM. "B"	26 1/2"	38 1/2"	38 1/2"	46 1/2"	46 1/2"
CL. OPENING	12"	18"	18"	22"	22"
INS. DEPTH	10 1/4"	16 1/4"	16 1/4"	20 1/4"	20 1/4"
Overall DEPTH	15 1/8"	21 1/8"	21 1/8"	25 1/8"	25 1/8"
SHELF QTY	1	2	3	3	4
WEIGHT/lbs	185	380	520	650	720

**MEGASAFE**  
HIGH SECURITY SAFES  
(800) 345-6552    www.megasafe.com