




Cash Vault SL-2

U.L. TL-30

The ISM Cash Vault SL is a third generation TL-30 with features that have been added in order to give full six-sided protection against sophisticated burglary attacks. The SL safe has a unique locking mechanism design which is found in only much higher priced safes.

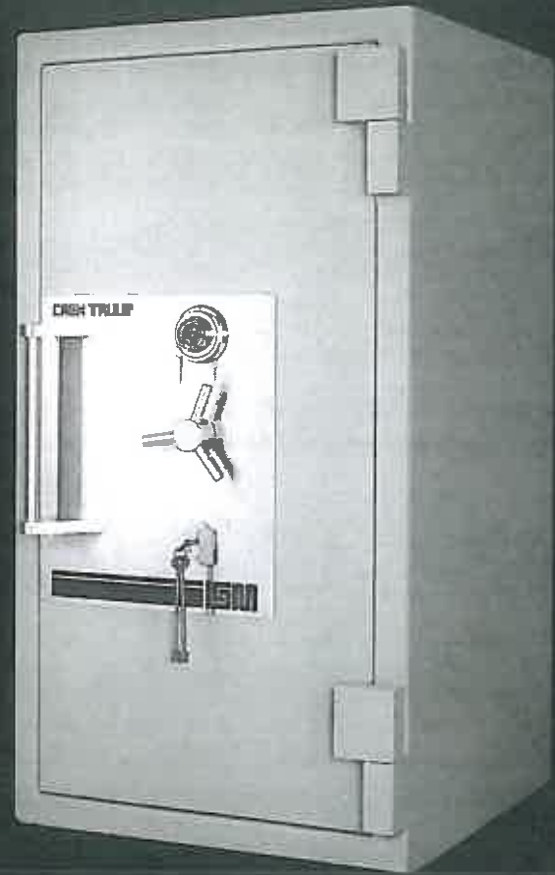

Door:

The overall thickness of the Cash Vault door is 150 mm (6"). The door's materials incorporate outer and inner 10 mm (0.4") thick steel plates continuously welded together that enclose a 30 mm (1.2") thick casting of C.N.A., ISM's superior torch and drill resistant composite material. The C.N.A. was developed by ISM to withstand all forms of attack by force, drills, and oxyacetylene cutters.

Body:

The Cash Vault SL body is 75 mm (3") thick overall. It incorporates outer and inner steel plates, that are continuously welded enclosing ISM's CS 650 monolith. The CS-650 monolith is a very high density mixture which is reinforced with a tough cage construction of heavy steel grids. In addition, the boltwork area is protected with drill resistant plates of high strength alloy steel. All this form a formidable barrier against tool, torch or drill attacks.

Locks:

The Cash Vault SL is equipped with a U.L. listed group 1 Manipulation Proof combination lock with a key locking dial. A second nine lever double-bit key lock is provided in conjunction with the combination lock (except for the 2621 model which has only the combination lock).

Boltwork:

The boltwork and locking mechanism were designed to give maximum protection against explosive attacks from all directions. The safe has a three way active boltwork plus an additional double action locking mechanism. Fixed bolts lock the hinge side of the door.

Relocking Devices:

The locks and vital mechanism areas are protected by a special glass plate which if tampered with releases a number of randomly located relockers independent of the lock. This provides the safe with a maximum security deterrent.

Interior Fittings:

Adjustable/removable shelves are available for setting up the safe interior to accept trays for jewelry, cash, and other valuables.


ISM Cash Vault SL-2 Dimensions and Weights



Model	Inside Dimensions (mm/in)			Outside Dimensions (mm/in)			Volume (Lt/Cu Ft)	Est. Weight*** (Kg/Lbs)
	Height	Width	Depth	Height	Width	Depth*		
SL2621	660 26.0	535 21.1	410 16.1	810 31.9	685 27.0	645 25.4	145 5.11	630 1390
SL3521	890 35.0	535 21.1	460 18.1	1040 40.9	685 27.0	695 27.3	219 7.74	790 1740
SL4521	1145 45.1	535 21.1	460 18.1	1295 51.0	685 27.0	695 27.3	282 9.97	950 2090
SL5521	1400 55.1	535 21.1	460 18.1	1550 61.0	685 27.0	695 27.3	345 12.18	1110 2440
SL6333	1600 63.0	840 33.1	460 18.1	1750 68.9	990** 39.0	695** 27.3	618 21.84	1530 3370
SL7233	1830 72.0	840 33.1	660 26.0	1980 77.9	990** 39.0	895** 35.2	1015 35.86	1930 4250

* Add 65mm. to outside depth for handle.
 ** (7233, 6333) Add 76 mm. to outside depth for hinges and 22 mm. to outside width for hinges.
 *** (2621, 3521, 4521, 5521, 7233) Door weights 25% of total weight.
 (6333) Door weights 28% of total weight!

Door Swing Projections

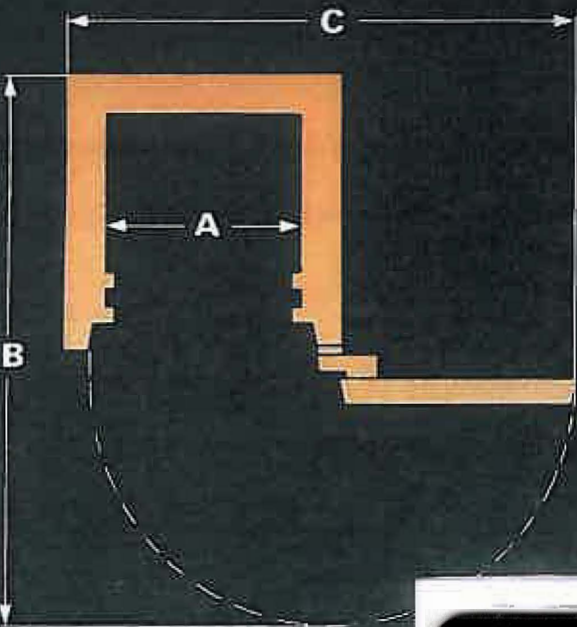

Door Swing Dimensions

Model	A	B	C
SL2621	535 21.1	1290 50.8	1280 50.4
SL3521	535 21.1	1340 52.8	1280 50.4
SL4521	535 21.1	1340 52.8	1280 50.4
SL5521	535 21.1	1340 52.8	1280 50.4
SL6333	840 33.1	1655 65.2	1550 62.6
SL7233	840 33.1	1855 73.0	1625 64.0

In line with our policy to provide the best in security, ISM reserves the right to incorporate any improvements and alter any specifications without prior notice.



MEGASAFE
HIGH SECURITY SAFES

(800) 345-6552

www.megasafe.com