

LORD 20 SERIES SAFES



UL LISTED

LORD 20 SERIES SAFES



The Lord 20 series range of commercial safes has been specifically designed to meet the needs of today's modern business function.

This comprehensive range of high security commercial safes is ideal for protecting medium sums of money as well as those company records which require higher level of security. Their ease of operation makes them ideal for everyday use in the office environment.

Body:

The safe body has an overall thickness of 78 mm encasing between inner and outer steel walls the special LORD high density refractory materials.

Door:

The door having a total thickness of 105 mm is press formed with the lockcase forming an integral part of the entire door structure offering additional strength against the cracksmans armoury.

Boltwork:

Heavy 29 mm diameter continuous steel locking bolts secure the door at the front and rear edge of the door by housing the locking bolts into specially reinforced sections of the safe body.

Locking:

A three wheel keyless combination lock which can be easily altered by the user secures the safe door. A six lever keylock can be fitted at a small additional cost

Deadlocking:

A standard feature on all LORD 20 Series safes is the special deadlocking mechanism which is designed to activate securing the locked door if the lock is dislodged with explosives or other means.

Finish:

All LORD 20 Series safes are finished in high quality lacquers which enhance the brushed chrome fascia panel, handles and locks.

For an individual colour choice to compliment your office decor discuss your requirements with your LORD safe representative.

Boltdown Facility


To ensure that your safe is not illegally removed, two boltdown holes are located in the base of your safe which is only accessible from inside

Internal Fittings:

Lockable drawers or fully adjustable shelves are available at a small extra cost.

Rotary Deposit Unit:

This optional posting facility can be fitted to the top of the safe during manufacture

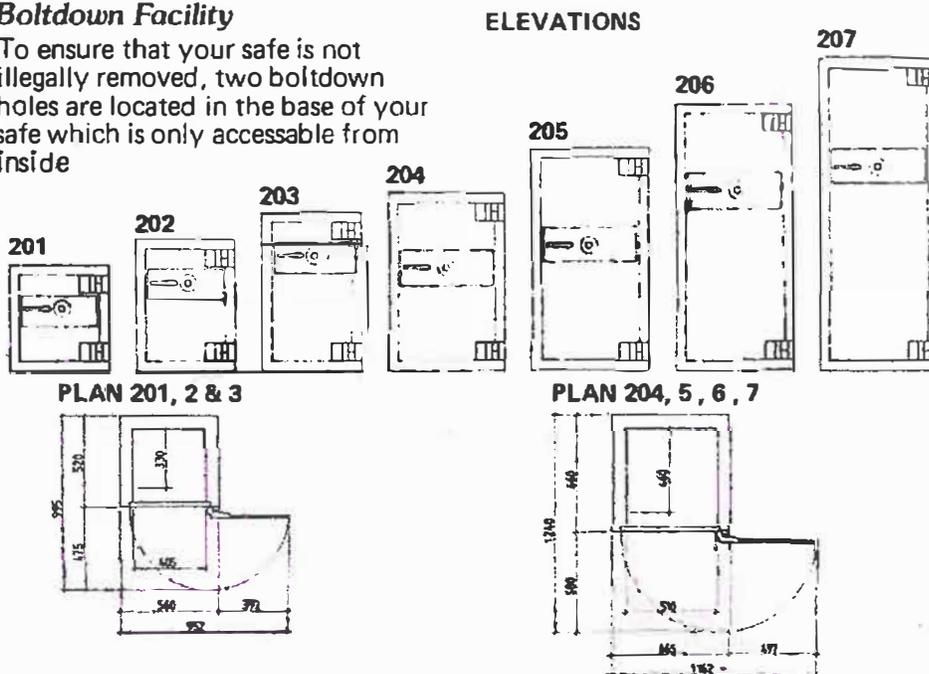

MODEL	201	202	203	204	205	206	207
EXTERNAL HEIGHT	602 (1'11 1/2")	752 (2'5 1/2")	902 (2'11 1/2")	1006 (3'3 3/4")	1265 (4'1 1/2")	1606 (4'11 1/2")	1756 (5'9 1/2")
EXTERNAL WIDTH	560 (1'10 1/2")	560 (1'10 1/2")	560 (1'10 1/2")	686 (2'2 3/4")	685 (2'2 3/4")	685 (2'2 3/4")	665 (2'2 1/4")
EXTERNAL DEPTH	520 (1'8 3/4")	520 (1'8 3/4")	520 (1'8 3/4")	660 (2'2")	660 (2'2")	660 (2'2")	690 (2'2 7/8")
INTERNAL HEIGHT	447 (1'5 3/4")	597 (1'11 1/2")	747 (2'5 3/4")	850 (2'9 3/4")	1100 (3'7 1/2")	1350 (4'5 1/2")	1600 (5'2 3/4")
INTERNAL WIDTH	405 (1'3 3/4")	405 (1'3 3/4")	405 (1'3 3/4")	510 (1'8")	510 (1'8")	510 (1'8")	510 (1'8")
INTERNAL DEPTH	330 (1'1")	330 (1'1")	330 (1'1")	460 (1'6 1/2")	460 (1'6 1/2")	460 (1'6 1/2")	460 (1'6 1/2")
CUBIC CAPACITY	0.08m ³ (2.1ft ³)	0.08m ³ (2.8ft ³)	0.10m ³ (3.5ft ³)	0.20m ³ (7.1ft ³)	0.26m ³ (9.2ft ³)	0.32m ³ (11.3ft ³)	0.38m ³ (13.4ft ³)
TOTAL WEIGHT	365kg (805lb)	415kg (915lb)	445kg (981lb)	655kg (1444lb)	790kg (1742lb)	925kg (2039lb)	1040kg (2293lb)



SAFE RATING BOARD
OF THE (DUTCH) CONSULTATIVE COMMITTEE
OF FRAUD AND ROBBERY INSURERS

TOOL RESISTANT SAFE CLASS TL-30

MEGASAFE
HIGH SECURITY SAFES
(800) 345-6552 www.megasafe.com