

WILKINSON  **Tann**

Cashier Safe

UL TL15 LABEL



...protecting the priceless



INTRODUCES

UL TL15 STANDARD* CASHIER SAFE 6-SIDED CONSTRUCTION

Test 1 March 1, 1978 determined that body construction complied with Underwriters Laboratories Standard U.L.687.

Test 2 April 18, 1978 unsuccessful attempt through door (awarded after 7 minutes).

*UL 687 Issue dated December 14, 1977.

INTERSEC 'CASHIER' TL15 OFFERS YOU IN ADDITION TO THE U.L. TEST, FOR THE FIRST TIME IN THE UNITED STATES, REAL 6-SIDED PROTECTION AGAINST:

- Oxy-acetylene
- Explosives
- Heavy tool attacks
- Power drilling
- Fire

CONSTRUCTION:

DOOR: The door construction is based on a slab of special drill and blowtorch resistant alloy over the whole surface of the door.

LOCKING: Standard locking, one 3-wheel combination lock. Locking variations are available at extra cost.

RELOCKING DEVICES: Additional locking devices come into operation every time the safe is locked to give protection against attack by explosives. In addition, the lock is mounted on a sensitive glass plate, which responds to any form of attack in the lock area operating one or more re-locking devices fixed to the door at random positions. An extra heat sensitive re-locking device operates if heat is applied to the safe door by oxygen cutting apparatus.

BODY: The outer and inner bodies are constructed from high grade steel electrically welded together to form one complete unit.

This new unit has a massive 3" monolithic body thickness instead of the previous UL TL15 standard of 1".


FINISH: Tann dark blue/gray with stainless steel fascia.

ANCHORING: Two high tensile steel bolts can be incorporated in the base of the body so that the safe can be fixed to concrete or wood floors to prevent removal from the premises by thieves, at extra cost.

DIMENSION (INCHES)

Model No.	EXTERNAL			INTERNAL			Approx. Weight LBS.
	High	Wide	Deep*	High	Wide	Deep	
1711	23"	17"	16½"	17"	11"	9¾"	400
2314	29"	20½"	23½"	23"	14½"	16¾"	800
3520	41"	26"	26½"	35"	20"	19¾"	1400
5020	56"	26"	26½"	50"	20"	19¾"	2026

*N.B. Add 1¼" for overall depth inclusive of hinges and handle on all sizes.

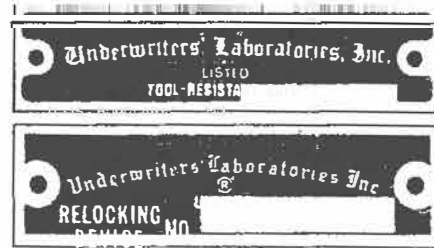

MEGASAFE

HIGH SECURITY SAFES

(800) 345-6552 www.megasafe.com