# International Dual Vault TL-15

## Six-Sided Protection plus Fire Protection

#### Composite Construction All Six Sides

The massive 4 inch door and 3 inch thick body incorporate a six-sided composite design using tough high-density concrete and steel matrix assuring both fire and burgulary protection.

#### Interior

Adjustable shelves in 1/2" increments on all models complemented by a removable, keylocking drawer.

#### Locking Bolts

Massive 1" locking bolts are activated with a convenient L-handle.

#### Hinges

The door pivots on dependable ballbearing hinges protected by an interior fixed locking bar.

#### U.L. Approved Combination Lock

Key changable, UL Group II combination lock is protected by two positive anti-atlack relocking devices, triggered to engage when the safe is attacked.

#### Keylock

High security 7-level keylock adds convenience to day security in addition to superior nighttime burgulary defence.

**MODEL DV300** 

The International DualVault is designed to offer commercial and residential users the same type of uncompromising security available on our highest security safes. It incorporates many of the same features while remaining affordable. The DualVault: superior protection against both burglary and fire.















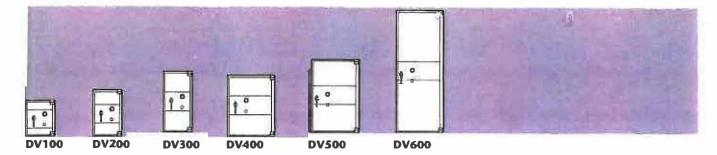

### International QualVault

MODEL	Intern	al Diame	eter/In. D	Externa H	l Diam W	eter/in. D*	Weight Lbs.	Capacity Cu. Ft.	Drawers/ Shelves	
DV100†	14	12	12	20	18	19½	455	1.16	0/1	
DV200	19	12	12	25	18	191/2	515	1.58	1/1	
DV300	25	12	12	31	18	191/2	765	2.08	1/1	
DV400	25	20	21	31	26	291/2	1285	6.07	1/1	
DV500	30	20	21	36	26	291/2	1485	7.29	1/2	
DV600	59	20	21	65	26	291/2	1950	14.34	1/3	


"Add 11/4" to depth for handle projection

We reserve the right to alter any specifications or make any improvements without prior notice.

\*DV100 is not supplied with a keylocking drawer.

#### **Door Swing Dimensions**

MODEL		s	
	Α	В	C
DV100	12	35	32
DV200	12	35	32
DV300	12	35	32
DV400	20	521/2	471/2
DV500	20	521/2	471/2
DV600	20	521/2	471/2



Distributed By:



