



Fichet-Bauché
GC 68
Bankers quality safe

FICHET-BAUCHE



GC68 BANKERS QUALITY SAFES



WALLS

All the walls of these safes have a total thickness of 153 mm (6") and are formed of a complex material called "Complexe GC", which adds Volcanite-two to the traditional and well-proven protection of Fichet-Bauche safes in an overlapping structure which increases the difficulties confronting the burglar.

DOOR

The door has a total thickness of 216 mm (8 1/2"), giving an actual protective thickness of 153 mm (6"), which is further reinforced in comparison with the walls, particularly in front of the locking and combination mechanisms.

It is mounted on external pivots, which enable it to be opened through 180°.


LOCKING

The principal locking mechanism is an "NS" pump lock. This high security lock is operated by a short key. It is linked to our "Monocommande" combination lock, which offers a total of 63 million real and different possible combinations, thus ensuring that the secret of the lock is kept. These two mechanisms are protected by the whole of the door's defences.

The three largest models can also be fitted with a time lock with three chronometers, which allows the safe door to be immobilised for a period determined by the user.



OVERALL DIMENSIONS

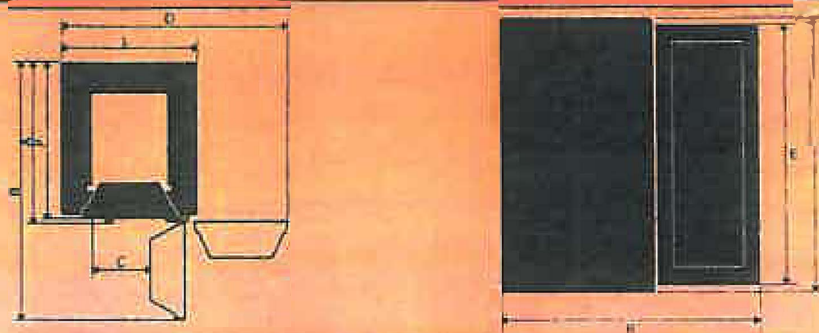

MODEL	HEIGHT	WIDTH	DEPTH	L	B	C	D	E
GC 100 / 27"	1 054 mm 39 1/2"	680 mm 26 3/4"	820 mm 32 3/8"	850 mm 33 1/2"	1 320 mm 52 3/4"	282 mm 11 1/8"	1 167 mm 46"	812 mm 32 1/4"
GC 200 / 43"	1 404 mm 55 1/4"	750 mm 29 1/2"	820 mm 32 3/8"	850 mm 33 1/2"	1 400 mm 55 1/8"	322 mm 12 5/8"	1 307 mm 51 1/2"	1 217 mm 47 5/8"
GC 350 / 51"	1 604 mm 63 1/8"	950 mm 37 3/8"	850 mm 33 3/8"	850 mm 33 1/2"	1 600 mm 63 0/8"	522 mm 20 1/2"	1 307 mm 67 1/4"	1 417 mm 55 3/4"
GC 600 / 65"	1 954 mm 76 7/8"	1 160 mm 45 5/8"	850 mm 33 3/8"	850 mm 33 1/2"	1 850 mm 74 5/8"	732 mm 28 3/4"	2 127 mm 85 3/4"	1 767 mm 69 1/2"

DIMENSIONS * add 1" (25 mm) for depth over handle.

MODEL	EXTERNAL DIMENSIONS			INTERNAL DIMENSIONS			VOLUME	WEIGHT
	HEIGHT	WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH		
GC 100 / 27"	1 054 mm 39 1/2"	680 mm 26 3/4"	850 mm 33 3/8"	694 mm 27 1/4"	374 mm 14 3/4"	410 mm 16 1/4"	110 cu-ft 3.9 cu-ft	1 300 kg 28.7 cwt
GC 200 / 43"	1 404 mm 55 1/4"	750 mm 29 1/2"	850 mm 33 3/8"	1 094 mm 43"	444 mm 17 1/2"	410 mm 16 1/4"	206 cu-ft 7.3 cu-ft	1 650 kg 32.5 cwt
GC 350 / 51"	1 604 mm 63 1/8"	950 mm 37 3/8"	850 mm 33 3/8"	1 294 mm 51"	644 mm 25 1/4"	410 mm 16 1/4"	355 cu-ft 12.5 cu-ft	2 250 kg 44.2 cwt
GC 600 / 65"	1 954 mm 76 7/8"	1 160 mm 45 5/8"	850 mm 33 3/8"	1 654 mm 65 1/8"	854 mm 33 5/8"	410 mm 16 1/4"	580 cu-ft 21 cu-ft	2 950 kg 58 cwt

DIMENSIONS OF INTERNAL CUPBOARDS *

MODEL	OVERALL INTERNAL DIMENSIONS			CLEAR INTERNAL DIMENSIONS				NUMBER OF LEAVES	WEIGHT
	Ht (mm)	WIDTH	DEPTH	Ht (mm)	WIDTH	DEPTH/DOOR	DEPTH/LOCK		
GC 100 / 27"	224 mm 8 3/4"	365 mm 14 1/2"	395 mm 15 1/2"	184 mm 7 1/4"	325 mm 12 3/8"	375 mm 14 3/4"	340 mm 13 3/8"	1	11 kg 0.25 cwt
GC 200 / 43"	314 mm 12 3/4"	435 mm 17 1/4"	395 mm 15 1/2"	164 mm 6 1/2"	385 mm 15 1/2"	475 mm 18 3/4"	340 mm 13 3/8"	1	12 kg 0.23 cwt
GC 350 / 51"	224 mm 8 3/4"	635 mm 25"	495 mm 19 1/2"	184 mm 7 1/4"	595 mm 23 3/8"	715 mm 28 1/4"	340 mm 13 3/8"	1	15 kg 0.32 cwt
GC 600 / 65"	314 mm 12 3/4"	645 mm 25 3/8"	495 mm 19 1/2"	164 mm 6 1/2"	784 mm 30 1/4"	525 mm 20 3/4"	340 mm 13 3/8"	2	28 kg 0.43 cwt

Megafast reserves the right to change specifications without prior notice.

MEGASAFE
HIGH SECURITY SAFES
(800) 345-6552 www.megasafe.com