



EXCALIBUR 60

**The Cutting Edge of Security
Technology**

Sotum's technological breakthrough in the use of superior, lightweight barrier materials provides:

- Far superior protection against torch and tool attack when compared to any safe in common use today.
- Maximum protection and minimal loss of useable space with the use of excalibur's space-age materials.
- Easy delivery to most high-rise buildings and situations with limited floor loads.

**The World's
First U.L. Approved
TRTL 60 x 6**



The EXCALIBUR TRTL 60 x 6

FEATURING

SUPERIOR	Protection against sophisticated burglary attack
SUPERIOR	Peace of mind with the knowledge that your valuables have been secured to the maximum
SUPERIOR	Insurance coverage
SUPERIOR	Lightweight for easy installation
SUPERIOR	Pricing for a 60 minute safe

The EXCALIBUR 60 replaces the TRTL30x6 safes as the standard for ultimate protection. Having been tested by Underwriters Laboratories to withstand the rigorous torch and tool test on all six sides for twice as long as the TRTL30x6, the EXCALIBUR 60 has been granted the TRTL60x6 label, thereby being in a class by itself.



Many years of research and development have culminated in the creation of the EXCALIBUR 60 by Soltam, Ltd., a technological leader in Israel and throughout the world. Specializing in metallurgical products, including armaments, and using its knowledge of weaponry penetration, Soltam has created barriers of uniquely high resistance in order to thwart expert burglars who use their own sophisticated arsenal.

Precision engineering and proud craftsmanship ensure that each safe is manufactured to the strictest standards - our own.



SPECIFICATIONS

DOOR AND BODY

The EXCALIBUR 60 door has an overall thickness of 8.2"; the five sides of the body each has a thickness of 4.8". The core of this exceptional, yet streamlined, construction is composed of INFINITRIX, a technologically revolutionary material. Having the ability to successfully withstand concentrated torch and tool attacks over extensive periods of time, INFINITRIX is unparalleled in its capacity to prevent penetration. In addition, particularly sensitive areas of the EXCALIBUR 60 have been even further reinforced to deflect the most serious of attacks.

BOLTWORK

On engagement of the capstan handle, eight chromed steel bolts each of 1.6" diameter, are driven horizontally and vertically through reinforced individual bolt chambers.

Additionally, the EXCALIBUR 60 door is secured firmly on the hinge side by the inclusion of 4 more bolts.

LOCKS AND RELOCKERS

The EXCALIBUR 60 includes a Sargent and Greenleaf U.L. Listed Group 1 Manipulation Proof combination lock plus a U.L. Listed key lock as standard equipment. The combination lock and key lock are each protected by a highly sensitized relocking system which is designed to activate in the event of a major attack.


FITTINGS AND FINISH

Adjustable and removable shelves are provided as standard. Compartments and special interiors are available as an option. The EXCALIBUR 60 features a durable and attractive textured finish, conveying the natural feeling of its strength while permitting the safe to blend subtly into a business environment.

OPTIONS


- Dual combination locks
- Left swing door (right swing is standard)
- Mechanical and electronic timeclock
- Special interiors

TRTL 60 x 6 DIMENSIONS & WEIGHTS

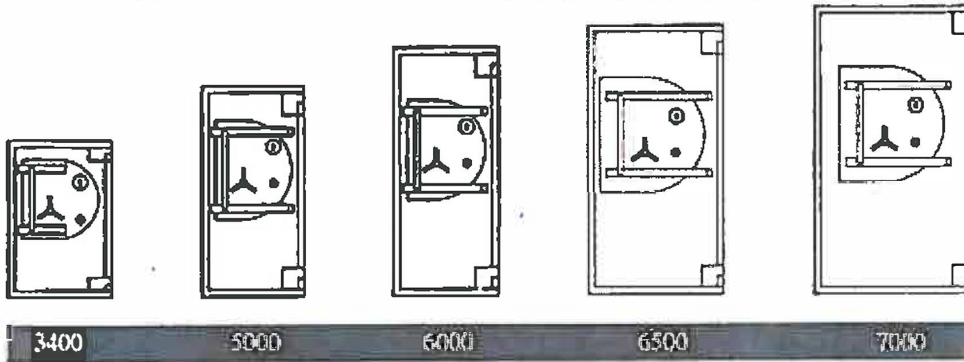

MODEL	INSIDE DIMENSIONS NFI AHD				OUTSIDE DIMENSIONS NFI AHD			
	H	W	R	D	H	W	A	D
3400	34	19.7	19.5	19.5	43.5	29.2	32.7	32.7
	(106.4	x 500)	x 495)		(1105	x 742)	x 831)	
5000	40.3	19.7	19.5	19.5	58.8	29.2	32.7	32.7
	(1252	x 500)	x 495)		(1494	x 742)	x 831)	
6000	59	19.7	19.5	19.5	68.5	29.2	32.7	32.7
	(1499	x 500)	x 495)		(1740	x 742)	x 831)	
6500	65	26	19.5	19.5	74.5	38.5	32.7	32.7
	(1651	x 737)	x 495)		(1892	x 978)	x 831)	
7000	70	36	25	25	79.5	45.5	38.2	38.2
	(1778	x 914)	x 635)		(2020	x 1156)	x 971)	

DOOR SWING DIMENSIONS

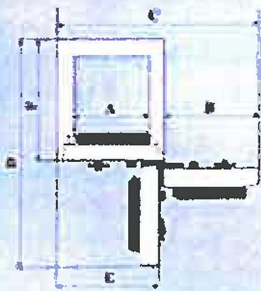

DOOR SWING DIMENSIONS

MODEL	A	B	C	D	E	F
3400	19.7	25.6	54.8	60.4	27.1	32.7
5000	19.7	25.6	54.8	60.4	27.1	32.7
6000	19.7	25.6	54.8	60.4	27.1	32.7
6500	29	33.9	73.4	69.7	36.4	32.7
7000	36	41.9	87.4	82.2	49.4	38.2

All measurements are in inches.

